



NARROW 350 mA

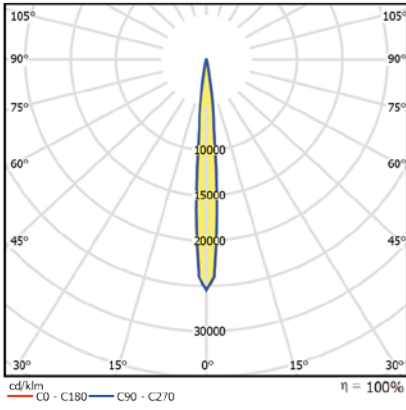

Distanza [m]	Diametro cono [m]	E(0°)	E(CD)
0.5	0.08	7534	4.8° 3602
1.0	0.17	1883	4.8° 951
1.5	0.25	837	4.8° 422
2.0	0.34	471	4.8° 238
2.5	0.42	301	4.8° 152
3.0	0.50	209	4.8° 106

Distanza [m] Diametro cono [m] Illuminamento [lx]
C0 - C180 (Angolo di dimezzamento: 9.6°)


MEDIUM 350 mA

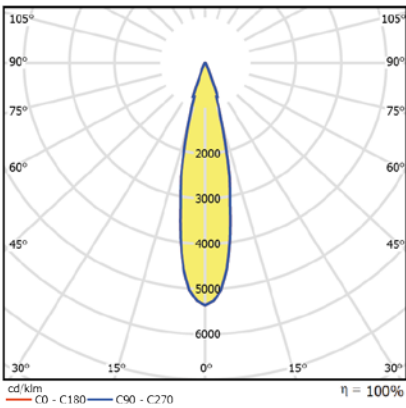

Distanza [m]	Diametro cono [m]	E(0°)	E(CD)
0.5	0.21	1587	11.6° 749
1.0	0.41	397	11.6° 187
1.5	0.62	176	11.6° 83
2.0	0.82	99	11.6° 47
2.5	1.03	63	11.6° 30
3.0	1.23	44	11.6° 21

Distanza [m] Diametro cono [m] Illuminamento [lx]
C0 - C180 (Angolo di dimezzamento: 23.2°)


WIDE 350 mA

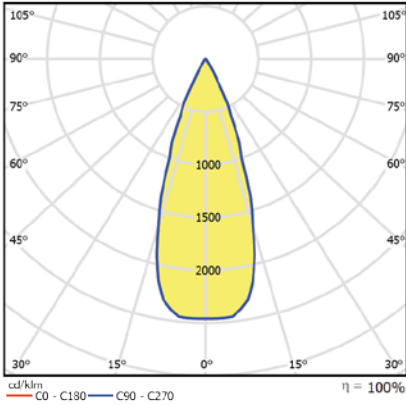

Distanza [m]	Diametro cono [m]	E(0°)	E(CD)
0.5	0.34	697	18.7° 298
1.0	0.68	174	18.7° 74
1.5	1.02	77	18.7° 33
2.0	1.35	44	18.7° 19
2.5	1.69	28	18.7° 12
3.0	2.03	19	18.7° 8

Distanza [m] Diametro cono [m] Illuminamento [lx]
C0 - C180 (Angolo di dimezzamento: 37.4°)

VERY WIDE 350 mA

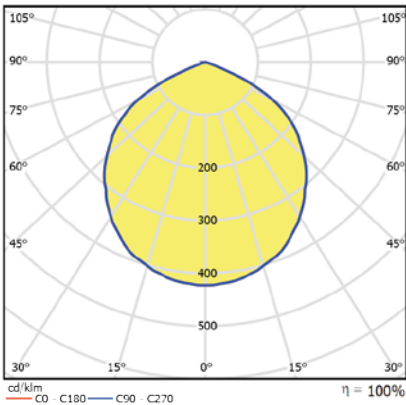

Distanza [m]	Diametro cono [m]	E(0°)	E(CD)
0.5	1.35	135	53.4° 14
1.0	2.69	34	53.4° 4
1.5	4.04	15	53.4° 2
2.0	5.39	8	53.4° 1
2.5	6.73	5	53.4° 1
3.0	8.08	4	53.4° 0

Distanza [m] Diametro cono [m] Illuminamento [lx]
C0 - C180 (Angolo di dimezzamento: 106.8°)